



HANGZHOU ZHENLANG IMP&EXP CO.,LTD
ZHEJIANG SETEC LIGHTING CO.,LTD

A d d : Floor 11th,Blossom Building,No.800 Minhe Road,Xiaoshan, Hangzhou,Zhejiang, China

Factory: Xinjianzhuang,Dongguan Town,Shangyu city,Zhejiang, China

T e l : 0571-57575061

F a x : 0571-57575062

E-mail: sales@beslam.com



2019
Light Makes The Future





Hangzhou Zhenlang IMP&EXP Co.,LTD(BESLAM) is the sales office of Zhejiang Setec Lighting Co.,LTD, which set up in 2006 in Shangyu city. It takes two hours from Shanghai and one hour from Ningbo by car, which is very convenient in transportation with three international airports and two seaports nearby. Our key products are LED desk lamp, LED emergency light, LED panel, spotlight, wall sconce and so on. Now we have established business with customers from more than 10 countries, such as Brazil, USA, South Korea, Japan, Middle East etc. under ETL, UL, KC, PSE, CE ROHS, Inmetro approval.

We equipped our production lines with highly automated manufacturing equipment, which has allowed us to produce very stable products at a short time and deliver goods at a much faster rate. Besides, the motivated and well trained workforce ensures our products are of a consistent quality and is functionally safe to meet all standards of the world. Our staff and manager take special care of design, order placement, manufacturing, testing and shipping.

Working to meet our corporate aim of “good quality and service, mutually beneficial cooperation”, we are also committed to continually introducing new technologies into our manufacturing processes. If you are interested in experiencing our services or wish to receive any more information, please don't hesitate to contact us.

We, BESLAM hope to establish and maintain a long-term successful alliance with you in the near future.



Good quality and service,
mutually beneficial cooperation



▶ LED Indoor Fixtures

LED Panel Light	P02
LED Slim Downlight	P03
LED Shop Light	P04
LED Desk Light	P05
LED Downlight	P07
LED Ceiling Light	P09
LED Ceiling Spot Light	P10
LED FPL Light	P11
LED PL Light	P12
LED Wall Sconce	P14

▶ LED Emergency Light

Smart Emergency Bulb	P16
LED Emergency Light	P17

▶ LED Outdoor Fixtures

LED High Bay	P20
LED Flood Light	P21
LED Bulkhead	P23

▶ LED Bulbs Portfolio

T8 Tube	P26
LED PL Lamp	P27
LED UFO Bulb	P28
LED U Lamp	P29
LED Decorative Filament	P31
LED Filament	P32
LED A Bulb	P33

LED Indoor Fixtures



www.beslam.com


BESLAM

LED Panel Light




TUV GS CE RoHS Erp


Installation Instruction




Surface Mount



Recessed



Suspension

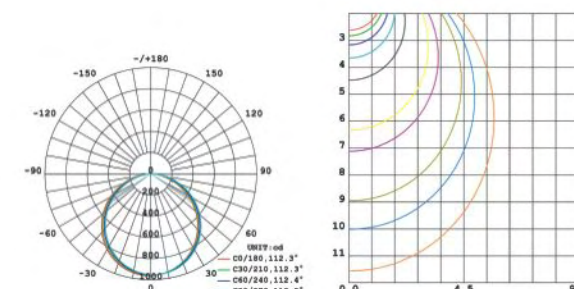


Ra ≥80 F PF >0.5 120° 25000h 90% Energy Saving 100% Light ON/OFF Switch 20000h 20000h 20000h

Model	Voltage	Power	Luminous flux	Beam Angle	Material	Dimension
ZL-PL6060-40W	AC100-240V	40W	3200lm	120°	Alu+PS	595*595*10.5mm
ZL-PL6262-40W	AC100-240V	40W	3200lm	120°	Alu+PS	615*615*10.5mm
ZL-PL30120-40W	AC100-240V	40W	3200lm	120°	Alu+PS	295*1195*10.5mm
ZL-PL30120-60W	AC100-240V	60W	4800lm	120°	Alu+PS	295*1195*10.5mm




www.beslam.com

LED Slim Downlight



Model	Voltage	Power	Luminous flux	Beam Angle	Material	Dimension
ZL-SDL-R/C 6W	AC100-240V	6W	350lm	120°	Alu+PS	120*120mm
ZL-SDL-R/C 12W	AC100-240V	12W	800lm	120°	Alu+PS	170*170mm
ZL-SDL-R/C 18W	AC100-240V	18W	1300lm	120°	Alu+PS	225*225mm
ZL-SDL-R/C 24W	AC100-240V	24W	1700lm	120°	Alu+PS	300*300mm

LED Shop Light

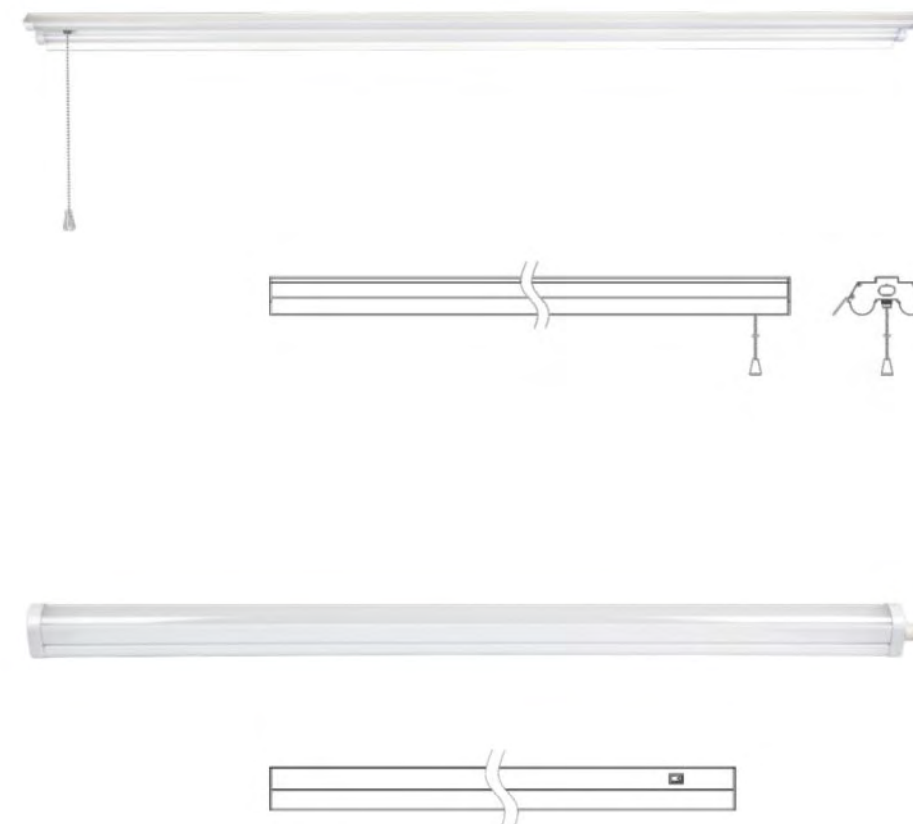

Features:

- 23W 4ft LED Garage Shop Light Fixture, Plug and Play and Linkable .
- UL rated.
- Material: PVC base +PC shade.



Model	Voltage	Power	Luminous flux	LEDS	Dimension
ZL-SELTF10	AC120-277V	23W	2400lm	SMD2835	1200*71*45mm
ZL-SELTF20	AC120-277V	23W	2000lm	SMD2835	1210*60*75mm



ZL-SELDL27

ZL-SELDL2289



ZL-SELDL09B

ZL-SELDL11

ZL-SELDL100



Features:

- Portable & Light-weight.
- Nice design and warm light.
- Economical and Environmentally Friendly.
- Diffuse PC cover.
- Multi choices to charge: PC, Power bank, laptop, USB power adapter etc.



Model	Voltage	Power	Luminous flux	Beam Angle	Material	Dimension
ZL-SELDL27	AC100-240V	3.5W	200lm	60°	PC	340*106mm
ZL-SELDL09B	AC100-240V	5W	350lm	120°	PC	390*120*340mm
ZL-SELDL11	AC100-240V	7W	430lm	120°	PC	460*105*380mm
ZL-SELDL100	AC100-240V	7W	350lm	120°	PC	398*90*320mm
ZL-SELDL2289	AC100-240V	11W	1000lm	120°	PC	682*130*528mm



ZL-SELD18



ZL-SELD181201



ZL-SELD181202



ZL-SELD181203



ZL-SELD181204



ZL-SELD181206



Features:

- Portable & Light-weight.
- Nice design and warm light.
- Economical and Environmentally Friendly.
- Diffuse reflector.



Model	Voltage	Power	Luminous flux	Beam Angle	Material	Dimension
ZL-SELD18	AC100-240V	5.5W	500lm	120°	PC	250*110*400mm
ZL-SELD181201	AC100-240V	7W	350lm	120°	PC	554*160*545mm
ZL-SELD181202	AC100-240V	10W	650lm	120°	PC	493*180*607mm
ZL-SELD181203	AC100-240V	6W	350lm	120°	PC	283*165*343mm
ZL-SELD181204	AC100-240V	6W	350lm	120°	PC	358*180*523mm
ZL-SELD181206	AC100-240V	6W	350lm	120°	PC	402*200*419mm






DIFFUSER

DIFFUSER



Traditional downlight:
only center illumination

Diffuser downlight:
a circle average illumination



Beam Angle(50%) 127.1°



Model	Voltage	Power	Luminous flux	Beam Angle	LEDs	Dimension
ZL-SELD309-5W	AC100-240V	5W	350lm	120°	SMD2835	85*30mm
ZL-SELD310-9W	AC100-240V	9W	650lm	120°	SMD2835	110*35mm
ZL-SELD311-14W	AC100-240V	14W	1000lm	120°	SMD2835	150*47mm
ZL-SELD312-18W	AC100-240V	18W	1250lm	120°	SMD2835	180*55mm
ZL-SELD313-28W	AC100-240V	28W	2000lm	120°	SMD2835	225*65mm
ZL-SELD301A-6W	AC100-240V	6W	480lm	120°	SMD2835	145*85mm
ZL-SELD301A-12W	AC100-240V	12W	960lm	120°	SMD2835	188*78mm
ZL-SELD301A-18W	AC100-240V	18W	1400lm	120°	SMD2835	188*78mm





DIFFUSER



Traditional downlight:
only center illumination

Diffuser downlight:
a circle average illumination

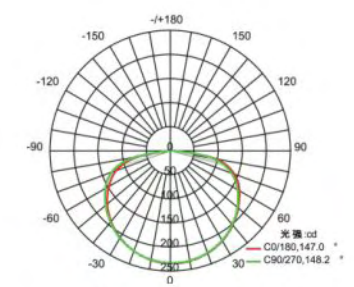

Beam Angle(50%) 127.1°

Features:

- Die_casting AL
- Diffuse Reflector
- E26 Connector



Model	Voltage	Power	Luminous flux	Beam Angle	LEDs	Dimension
ZL-SELD312US-12W	AC120-277V	12W	900lm	120°	SMD2835	190*73mm
ZL-SELD312US-18W	AC120-277V	18W	1250lm	120°	SMD2835	190*73mm







LED Ceiling Light





Installation Instruction

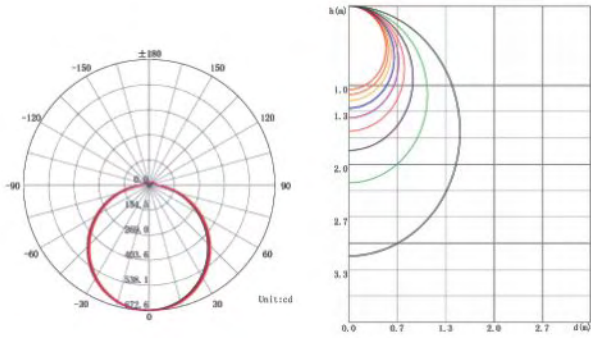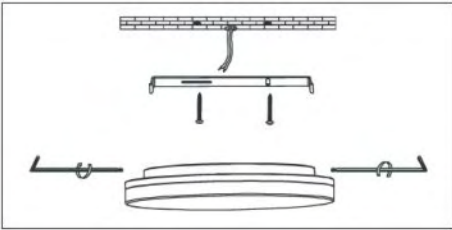


Model	Voltage	Power	Luminous flux	Beam Angle	Material	Dimension
ZL-CL 11-18W	AC220-240V	18W	1600lm	120°	PC	220*220*72mm
ZL-CL 11-24W	AC220-240V	24W	2050lm	120°	PC	280*280*72mm
ZL-CL 11-36W	AC220-240V	36W	2600lm	120°	PC	330*330*78mm
ZL-CL 11-18W	AC220-240V	18W	1600lm	120°	PC	220*220*72mm
ZL-CL 11-24W	AC220-240V	24W	2050lm	120°	PC	280*280*72mm
ZL-CL 11-36W	AC220-240V	36W	2600lm	120°	PC	330*330*78mm
ZL-SELC108	AC100-240V	18W	1300lm	120°	PC	308*308*103mm



LED Ceiling Spot Light

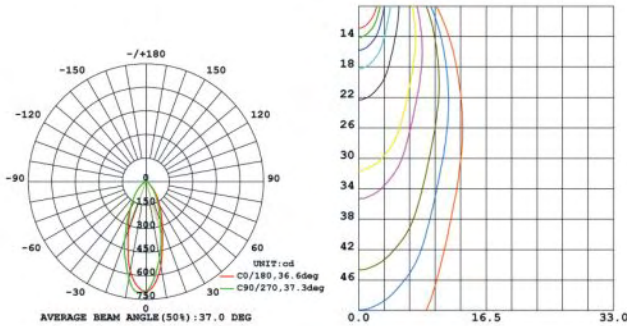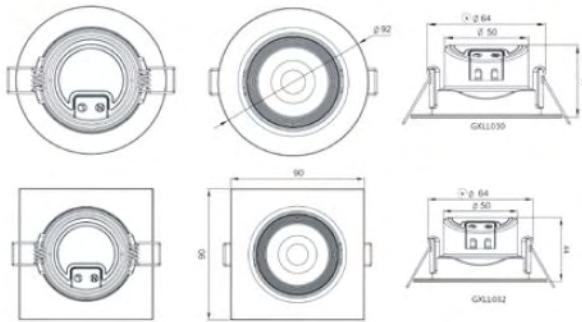

Model	Voltage	Power	Luminous flux	Material	Beam Angle	Dimension	Cut Hole
ZL-SP-5W	AC220-240V	5W	350lm	PC	38° /120°	Φ90*45mm	70-75mm
ZL-SP-7W	AC220-240V	7W	500lm	PC	38° /120°	Φ90*45mm	70-75mm
ZL-SP-10W	AC220-240V	10W	800lm	PC	38° /120°	Φ120*50mm	90-95mm
ZL-SP-12W	AC220-240V	12W	1000lm	PC	38° /120°	Φ120*50mm	90-95mm
ZL-SP-15W	AC220-240V	15W	1200lm	PC	38° /120°	Φ145*55mm	120-125mm
ZL-SP-18W	AC220-240V	18W	1400lm	PC	38° /120°	Φ145*55mm	120-125mm





Features:

- Protect environment from pollution, bring a green and healthy life.
- High CRI ≥ 80 , replaceable of traditional FPL tubes.
- Glass tube and PC body with good heatsink.



Model	Voltage	Power	Luminous flux	Dimension
ZL-HPL-20W	AC220-240V	20W	2000lm	50*677*53mm
ZL-HPL-40W	AC220-240V	40W	4000lm	677*677*53mm



Type A+B




Features:

- Protect environment from pollution, bring a green and healthy life.
- High CRI ≥ 80 , replaceable of traditional FPL tubes.
- Glass tube and PC body with good heatsink.



Model	Voltage	Power	Luminous flux	Emergency time	Dimension
ZL-ADPL-17W	AC100-240V	AC17W/DC7W	AC1700lm/DC1000lm	2.5h	62*520*27mm
ZL-APL-15W typeA+B	AC220-240V	15W	1800lm	N/M	400*44*23mm
ZL-APL-18W typeA+B	AC220-240V	18W	2200lm	N/M	520*44*23mm







www.beslam.com





LED Wall Sconce



Installation Instruction

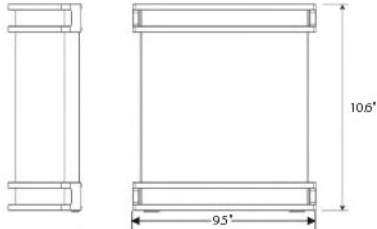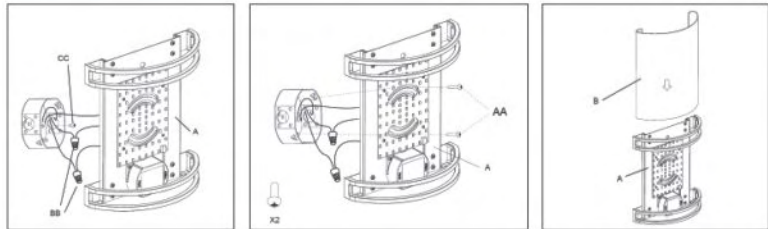

Installation Instruction

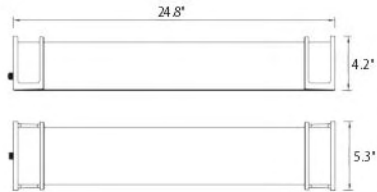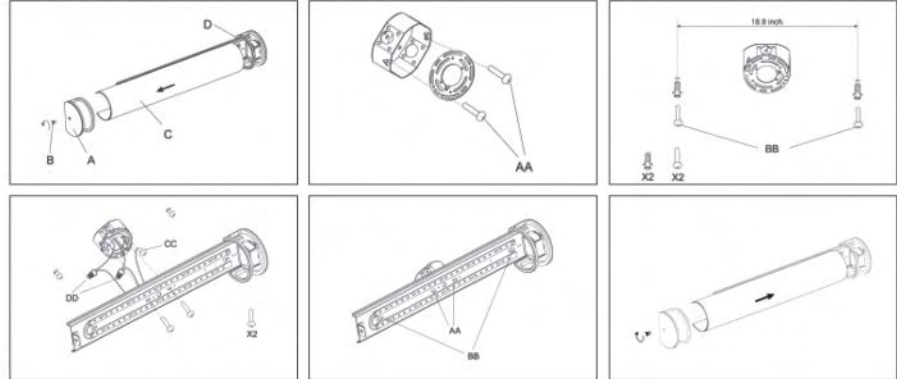

Model	Voltage	Power	Luminous flux	Beam Angle	Material	Dimension
ZL-WL101-15W	AC120-277V	15W	1200lm	120°	Aluminum frame	271.5*240*95mm
ZL-WL101-22W	AC120-277V	22W	1650lm	120°	Aluminum frame	271.5*240*95mm
ZL-WL102-22W	AC120-277V	22W	1650lm	120°	Aluminum frame	631*135*106mm




www.beslam.com

LED Emergency Light





www.beslam.com




BESLAM

Smart Emergency Bulb

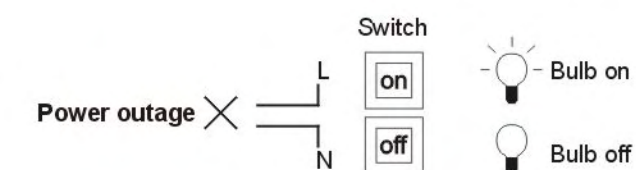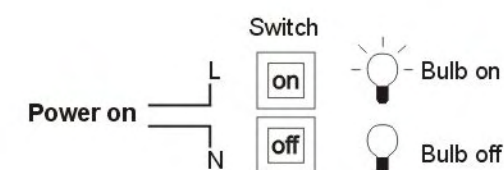

TUV GS CE RoHS Erp



BeamAngle(50%) 149.4°



Model	Voltage	Battery	Luminous flux	Emergency time	Base	Dimension
ZL-A60-6W	AC100-240V	3.7V/0.8 Ah Lithium battery	AC400lm/DC150lm	2h	E27	60*120mm
ZL-A70-8W	AC100-240V	3.7V/0.8 Ah Lithium battery	AC650lm/DC150lm	2h	E27	70*130mm
ZL-A80-12W	AC100-240V	3.7V/0.8 Ah Lithium battery	AC1000lm/DC150lm	2h	E27	80*145mm

www.beslam.com





ZL-103L



ZL-106L30



ZL-108L



ZL-1520L36



Features:

- With overcharge protection and overdischarge protection.
- PC cover, other plastic parts ABS antflaming.
- Wall Mount/Ceiling Mount installation.



Model	Voltage	Battery	Luminous flux	Emergency time	Materials	Dimension
ZL-103L	AC100-240V	3.6V/1.5Ah Lithium battery	140lm	3h	ABS+PC	346*107*60mm
ZL-106L30	AC100-240V	3.6V/1.2Ah NI-CD battery	160lm	4h	ABS+PC	260*100*45mm
ZL-108L	AC100-240V	3.6V/2.2Ah NI-CD battery	180lm	4h	ABS+PC	356*136*65mm
ZL-1520L36	AC100-240V	3.7V/1.5Ah Lithium battery	100lm	4h	ABS+PC	370*80*65mm



ZL-5112L30



ZL-5216L30



ZL-5216L60



ZL-5217L30



Features:

- With overcharge protection and overdischarge protection.
- PS cover, other plastic parts ABS.
- Wall Mount/Ceiling Mount installation.




Model	Voltage	Battery	Luminous flux	Emergency time	Materials	Dimension
ZL-5112L30	AC100-240V	3*(1.2V/0.6Ah NI-CD battery)	100lm	3h	ABS+PS	220*58*28mm
ZL-5216L30	AC100-240V	3.7V/1.0Ah Lithium battery	120lm	2h	ABS+PS	220*58*28mm
ZL-5216L60	AC100-240V	3.7V/1.6Ah Lithium battery	150lm	3h	ABS+PS	220*58*28mm
ZL-5217L30	AC100-240V	3.7V/0.8Ah Lithium battery	120lm	3h	ABS+PS	195*50*38mm



LED Outdoor Fixtures




www.beslam.com





BESLAM

LED High Bay

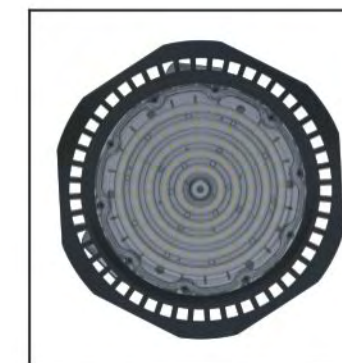

TUV GS CE RoHS Erp


Installation Instruction

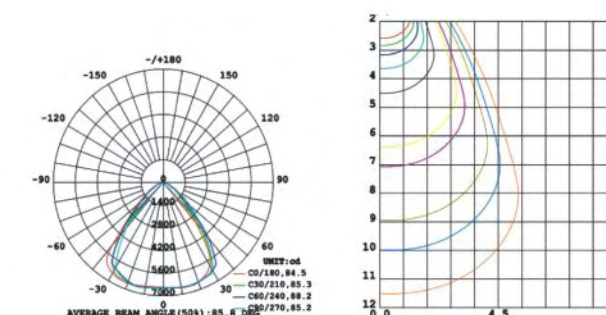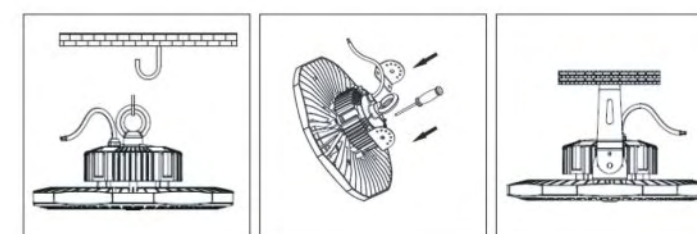

Ra ≥80, F, PF >0.9, 60°/90°/120°, 25000h, 90% Energy Saving, 100% Light, ON/OFF Switch, 20,000, 20, 40, IP65



Model	Voltage	Power	Luminous flux	Beam Angle	Material	Dimension
ZL-HB-100W	AC100-240V	100W	14000lm	60° 90° 120°	Graphene+Aluminum	φ 270*H151mm
ZL-HB-150W	AC100-240V	150W	21000lm	60° 90° 120°	Graphene+Aluminum	φ 320*H159mm
ZL-HB-200W	AC100-240V	200W	28000lm	60° 90° 120°	Graphene+Aluminum	φ 380*H166mm

www.beslam.com





Model	Voltage	Power	Luminous flux	LEDs	Driver	IP Grade
ZL-FL-P6-10W-S	AC100-240V	10W	800lm	SMD2835	LIC/AC	IP44
ZL-FL-P6-20W-S	AC100-240V	20W	1600lm	SMD2835	LIC/AC	IP44
ZL-FL-P6-30W-S	AC100-240V	30W	2400lm	SMD2835	LIC/AC	IP44
ZL-FL-P6-50W-S	AC100-240V	50W	4000lm	SMD2835	LIC/AC	IP44

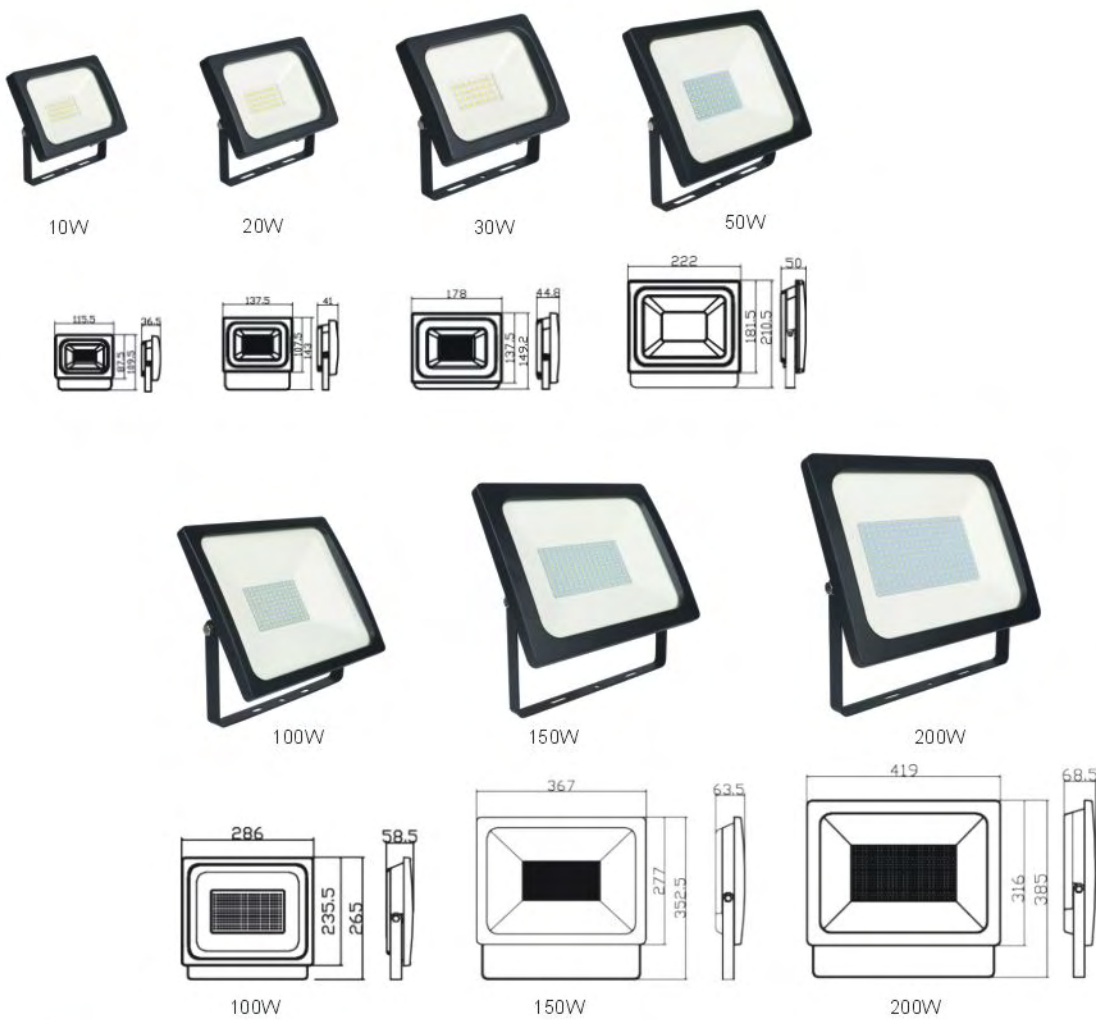

Model	Voltage	Power	Luminous flux	LEDs	Driver	IP Grade
ZL-FL-P6-10W	AC100-240V	10W	800lm	SMD2835	LIC/AC	IP65
ZL-FL-P6-20W	AC100-240V	20W	1600lm	SMD2835	LIC/AC	IP65
ZL-FL-P6-30W	AC100-240V	30W	2400lm	SMD2835	LIC/AC	IP65
ZL-FL-P6-50W	AC100-240V	50W	4000lm	SMD2835	LIC/AC	IP65
ZL-FL-P6-100W	AC100-240V	100W	8000lm	SMD2835	LIC/AC	IP65
ZL-FL-P6-150W	AC100-240V	150W	12000lm	SMD2835	LIC/AC	IP65
ZL-FL-P6-200W	AC100-240V	200W	16000lm	SMD2835	LIC/AC	IP65






LED Bulkhead




TUV GS CE RoHS Erp

Installation Instruction

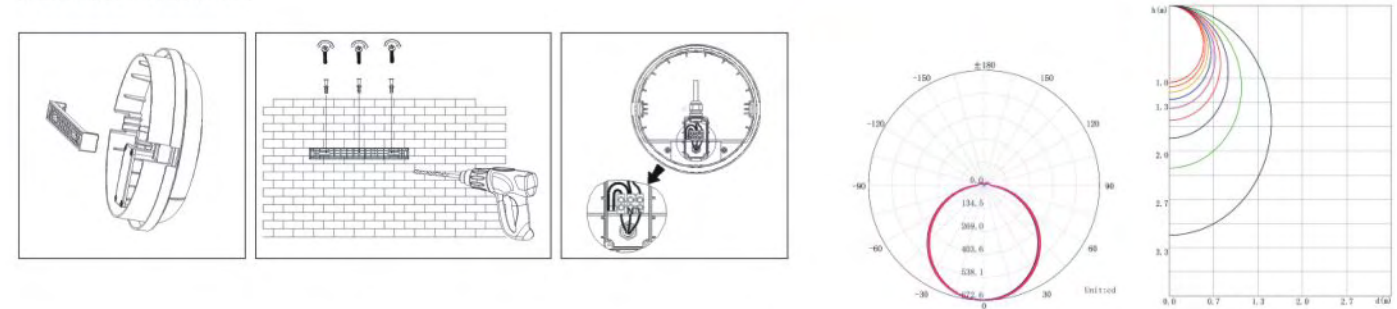

Ra ≥80 F PF >0.9 120° 25000h 90% Energy Saving 100% Light ON/OFF ≥20,000 Switch °C IP65

Model	Voltage	Power	Luminous flux	Beam Angle	Material	Dimension
ZL-BK-10W-Oval	AC100-240V	10W	800lm	120°	PC	170*88*69mm
ZL-BK-20W-Oval	AC100-240V	20W	1600lm	120°	PC	270*145*81mm
ZL-BK-10W-R	AC100-240V	10W	800lm	120°	PC	160*160*72mm
ZL-BK-20W-R	AC100-240V	20W	1600lm	120°	PC	220*220*78mm
ZL-BK-30W-R	AC100-240V	30W	2400lm	120°	PC	280*280*80mm




LED Bulkhead




TUV GS CE RoHS Erp

Installation Instruction

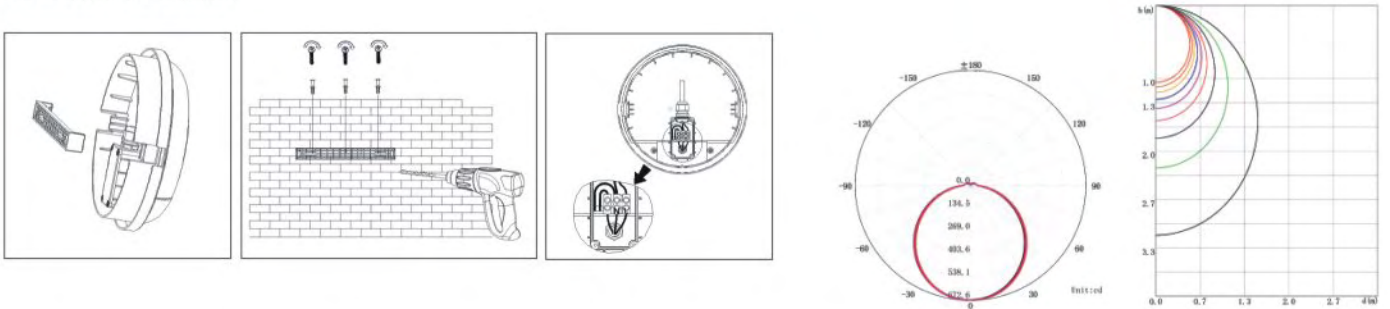

Ra ≥80 F PF >0.9 120° 25000h 90% Energy Saving 100% Light ON/OFF ≥20,000 Switch °C IP65


Model	Voltage	Power	Luminous flux	Beam Angle	Material	Dimension
ZL-BK-10W-Oval-PIR	AC100-240V	10W	800lm	120°	PC	170*88*69mm
ZL-BK-20W-Oval-PIR	AC100-240V	20W	1600lm	120°	PC	270*145*81mm
ZL-BK-10W-R-PIR	AC100-240V	10W	800lm	120°	PC	160*160*72mm
ZL-BK-20W-R-PIR	AC100-240V	20W	1600lm	120°	PC	220*220*78mm
ZL-BK-30W-R-PIR	AC100-240V	30W	2400lm	120°	PC	280*280*80mm



LED Bulb





www.beslam.com



BESLAM

T8 Tube

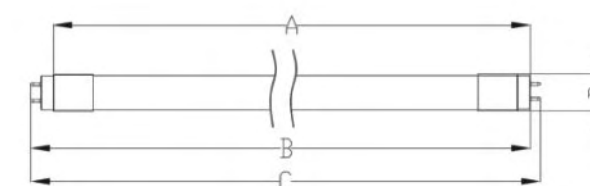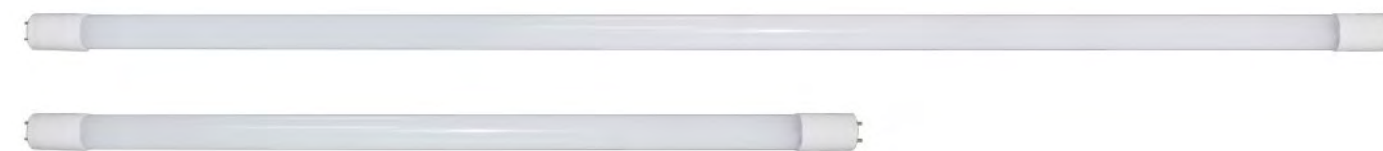

Specifications:

- Replaces fluorescent tubes.
- Retail, offices, schools, hospitals.
- Architectural lighting.

Key Features:

- Fixed end caps.
- High lumen output.
- Up to 50% energy savings.
- No mercury or lead.
- Last 3-5 times longer than fluorescent tubes.
- No flicker or hum.
- Maintenance-free.
- Useful life expectancy >35,000 hours



Model	Voltage	Power	Luminous flux	Beam Angle	Material	LEDs
ZL-T8-0.6m-9W	AC110-240V	9W	900lm	270°	Glass /PC	SMD2835
ZL-T8-1.2m-18W	AC110-240V	18W	1800lm	270°	Glass /PC	SMD2835
ZL-T8-1.5m-24W	AC110-240V	24W	2100lm	270°	Glass /PC	SMD2835


www.beslam.com





360° Rotatable

PATENT

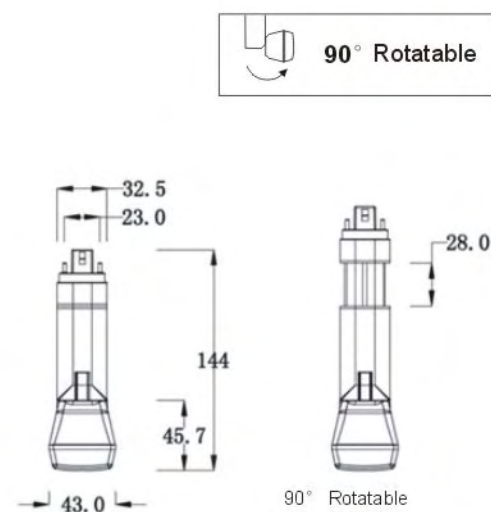


90° Rotatable



360° Rotatable


PATENT

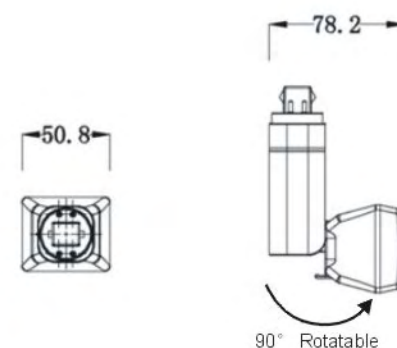

90° Rotatable



Model	Voltage	Power	Luminous flux	Material	Cap	Length
ZL-PL-6W	AC120-277V	6W	700lm	PC	E26/G24Q/E27	128mm
ZL-PL-9W	AC120-277V	9W	1000lm	PC	E26/G24Q/E27	138mm




Model	Voltage	Power	Luminous flux	Beam Angle	Material	Dimension
ZL-U110S-15W	100-240V	15W	1350lm	120°	Alu+pc	D110*H101mm
ZL-U130S-30W	100-240V	30W	2700lm	120°	Alu+pc	D130*H116mm
ZL-U150S-50W	100-240V	50W	4500lm	120°	Alu+pc	D150*H134mm
ZL-U110L-15W	100-240V	15W	1350lm	120°	Alu+pc	D110*H121mm
ZL-U130L-30W	100-240V	30W	2700lm	120°	Alu+pc	D130*H142mm
ZL-U150L-50W	100-240V	50W	4500lm	120°	Alu+pc	D150*H164mm



Model	Voltage	Power	Luminous flux	Beam Angle	Material	Base	Dimension
ZL-T80-30W	AC100-240V	30W	2700lm	180°	Alu+PC	E27	80*150mm
ZL-T100-40W	AC100-240V	40W	3600lm	180°	Alu+PC	E27	100*180mm
ZL-T120-50W	AC100-240V	50W	4500lm	180°	Alu+PC	E27/E40	120*210mm
ZL-T140-70W	AC100-240V	70W	6300lm	180°	Alu+PC	E27/E40	140*240mm
ZL-T140-100W	AC100-240V	100W	9000lm	180°	Alu+PC	E27/E40	140*270mm






Features

- High Lumen : > 100lm/W
- Coated Glass tube + Plastic Body
- High Watt Series



Model	Voltage	Power	Luminous flux	Material	Base	Dimension
ZL-U4T4-22W	AC120-277V	22W	2400lm	PC body+glass cover	E26/G24Q	D58*H195/H188mm
ZL-U4T5-30W	AC120-277V	30W	3300lm	PC body+glass cover	E26/E39	D73*H235/H242mm
ZL-U5T5-50W	AC120-277V	50W	5500lm	PC body+glass cover	E26/E39	D91*H240/H250mm
ZL-U8T5-80W	AC120-277V	80W	8800lm	PC body+glass cover	E39	D127*H305mm
ZL-U10	AC180-260V	10W	900lm	Alu+PC	E27/E26	D48*H148mm
ZL-U15	AC180-260V	15W	1350lm	Alu+PC	E27/E26	D48*H163mm
ZL-U20	AC180-260V	20W	1800lm	Alu+PC	E27/E26	D62*H205mm
ZL-U35	AC180-260V	35W	2800lm	Alu+PC	E27/E26	D72*H226mm
ZL-U50	AC180-260V	50W	4500lm	Alu+PC	E27/E26	D88*H270mm
ZL-U75	AC180-260V	75W	6400lm	Alu+PC	E40	D97*H330mm
ZL-U100	AC180-260V	100W	8500lm	Alu+PC	E40	D125*H370mm
ZL-U120	AC180-260V	120W	10000lm	Alu+PC	E40	D125*H370mm

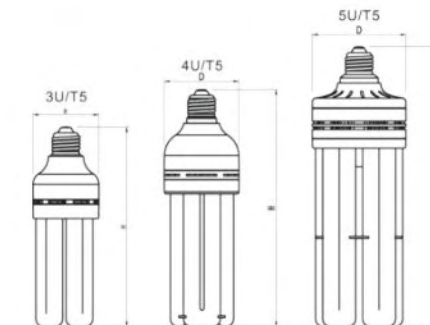

Features

- High Lumen : > 100lm/W
- Coated Glass tube + Plastic Body
- High Watt Series



Model	Voltage	Power	Luminous flux	Material	Base	Dimension
ZL-U3T5-20W	AC100-240V	20W	2000lm	PC body+glass cover	E27/E26	D64*H195mm
ZL-U3T5-27W	AC100-240V	27W	2700lm	PC body+glass cover	E27/E26	D64*H225mm
ZL-U4T5-36W	AC100-240V	36W	3600lm	PC body+glass cover	E27/E26	D73*H230mm
ZL-U4T5-45W	AC100-240V	45W	4500lm	PC body+glass cover	E27/E26	D73*H270mm
ZL-U5T5-54W	AC100-240V	54W	5400lm	PC body+glass cover	E27/E26	D91*H270mm
ZL-U6T5-65W	AC100-240V	65W	6500lm	PC body+glass cover	E27/E26	D106*H315mm





Features

- Mercury&Lead Free
- Special shape available .



Model	Voltage	Power	Luminous flux	Beam angle	Base	Shape
ZL-FLEXIBLE-4W	AC100-240V	4W	220lm	300°	E27	A60/ST64/T30/T45/G80/G95/G125
ZL-SMOKE-4W	AC100-240V	4W	80lm	300°	E27	A60/ST64/T30/T45/G80/G95/G125
ZL-DECO-8W	AC100-240V	8W	350lm	300°	E27	Diamond/ Square/ Sphere
ZL-STARRY-2W	AC100-240V	2W	70lm	300°	E27	ST64/G95/G125
ZL-3DF-2W	AC100-240V	2W	50lm	300°	E27	ST64/G95/G125/Diamond/Square/Star/Heart





Features

- Mercury&Lead Free
- Suitable for replacement of 50~70W incandescent lamps.
- High efficiency.



Model	Voltage	Power	Luminous flux	Beam angle	Base	Dimension
ZL-FC35/G45-2W	AC110/220V	2W	250lm	300°	E27	35*97mm / 45*78mm
ZL-FC35/G45-4W	AC110/220V	4W	450lm	300°	E27	35*97mm / 45*78mm
ZL-FC35/G45-6W	AC110/220V	6W	560lm	300°	E27	35*97mm / 45*78mm
ZL-FA60/ST64-4W	AC100-240V	4W	450lm	300°	E27	60*105mm / 64*138mm
ZL-FA60/ST64-6W	AC100-240V	6W	650lm	300°	E27	60*105mm / 64*138mm
ZL-FA60/ST64-8W	AC100-240V	8W	800lm	300°	E27	60*105mm / 64*138mm
ZL-FG95/G125-4W	AC110/220V	4W	450lm	300°	E27	95*135mm / 125*173mm
ZL-FG95/G125-6W	AC110/220V	6W	650lm	300°	E27	95*135mm / 125*173mm
ZL-FG95/G125-8W	AC110/220V	8W	800lm	300°	E27	95*135mm / 125*173mm
ZL-FT30-2W	AC110/220V	2W	150lm	300°	E27	30*125mm
ZL-FT30-4W	AC110/220V	4W	350lm	300°	E27	30*145mm / 30*185mm
ZL-FT30-6W	AC110/220V	6W	600lm	300°	E27	30*185mm / 30*225mm
ZL-FT30-8W	AC110/220V	8W	800lm	300°	E27	30*300mm



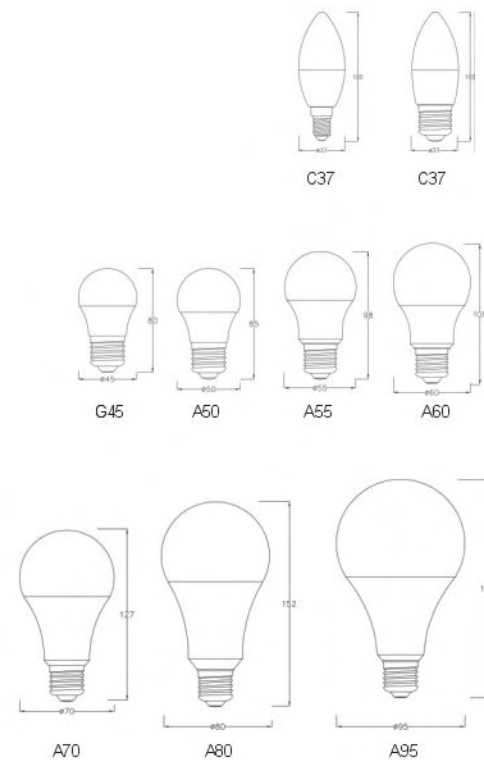

Features:

- 180° wide angle, E14/E27 lamp base, insulating and safe.
- Protect environment from pollution, bring a green and healthy life.
- High CRI ≥ 80 , replaceable of traditional incandescent bulbs.
- PC+Alu body with good heatsink.



Model	Voltage	Power	Luminous flux	Beam angle	Base	Dimension
ZL-A50-5W	AC100-240V	5W	450lm	180°	E27	50*85mm
ZL-A55-7W	AC100-240V	7W	600lm	180°	E27	55*98mm
ZL-A60-9W	AC100-240V	9W	800lm	180°	E27	60*108mm
ZL-A60-11W	AC100-240V	11W	1051lm	180°	E27	60*118mm
ZL-A60-12W	AC100-240V	12W	1200lm	180°	E27	60*118mm
ZL-A70-14W	AC100-240V	14W	1500lm	180°	E27	70*127mm
ZL-A80-17W	AC100-240V	17W	1700lm	180°	E27	80*152mm
ZL-A95-20W	AC100-240V	20W	1800lm	180°	E27	95*162mm
ZL-C37/G45-5W	AC220-240V	5W	470lm	180°	E14/E27	45*82mm/37*100mm
ZL-C37/G45-6W	AC220-240V	6W	600lm	180°	E14/E27	45*88mm/37*106mm

NOTES:

NO. _____
DATE. _____

