

**BESLAM**

# PRODUCT CATALOG



LIGHTING THE FUTURE  
WITH INNOVATION

## **HANGZHOU ZHENLANG PHOTOELECTRIC TECHNOLOGY CO.,LTD ZHEJIANG SETEC LIGHTING CO.,LTD**

Address: 901, Block A, Yanxiang Building, No. 333 Jianghong Road, Xixing Street,  
Binjiang District, Hangzhou City, Zhejiang Province

Factory: xinjianzhuang.Dongguan Town,Shangyu city,Zhejiang.China

Telephone: 0571-86797698

Fax: 0571-57575062

E-mail: sales@beslam.com

Light Makes The Future

**BESLAM**



## Hangzhou Factory – Bulb Assembly & Housing Production

### **Introduction:**

Established in 2016, the Hangzhou factory is one of BESLAM's key manufacturing bases for LED bulbs and housing components. The facility integrates bulb assembly with injection molding, blowing, and punching workshops, supported by automated equipment and a professional team of over 200 employees. Its convenient location also ensures efficient global shipment.

Key Advantages:

- Strong production capacity – 22 E27 lines, 4 B22 lines, 1 GU10 line, and 6 T-series lines.
- Complete supporting facilities – 82 injection machines, 20 blowing machines, and 27 punching machines.
- 2026 expansion – Investment in 40 new production lines to further increase capacity. With the new lines in 2026, production now covers not only light sources but also lighting fixtures.
- Raw material integration – Newly established plastic pellet workshop for stable supply and cost control.
- In-house packaging production – Packaging is produced internally to ensure flexibility, customization, and faster delivery.
- Reliable quality control – ISO system with EMC, glow-wire, torsion, and thermal shock testing.

## Shaoxing Factory – Zhejiang Setec Lighting Co., Ltd.

### **Introduction:**

Established in 2003, our Shaoxing facility is the founding base of BESLAM Group and one of the earliest lighting manufacturers in Zhejiang. Spanning over 100,000m<sup>2</sup>, this factory boasts 50+ production lines, including 8 injection lines, 4 punch press lines, and 6 blow molding lines. Key Strengths:

- 20+ years of manufacturing experience
- Close proximity to Ningbo and Shanghai ports
- Certified with ISO9000, ISO14000, UL, ETL, and PSE
- Equipped for EMC, surge, IES, hi-pot, oven testing and more
- Over 400 skilled employees





# Thailand Factory – For U.S. Market Supply

### Introduction:

Established in 2024, our Thailand factory is strategically positioned near Laem Chabang and Bangkok, focusing exclusively on U.S. market compliance and delivery. Designed for flexibility and localization, it enhances BESLAM's global layout and tariff-friendly export capabilities. Features:

- 20,000m<sup>2</sup> manufacturing space
- 1 SMT line, 1 punching machine
- ISO9001 and ETL certified
- Highly efficient, built for small-batch flexibility
- 50+ trained local employees




## CONTENT



LED Indoor Fixtures ----- P01-16




LED Emergency Light ----- P17-20

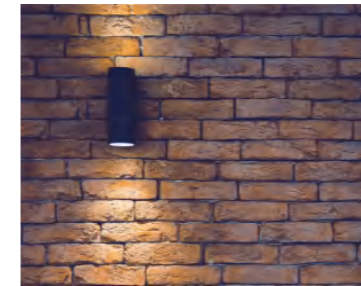

LED Outdoor Fixtures ----- P21-28



LED Bulbs Portfolio ----- P29-40

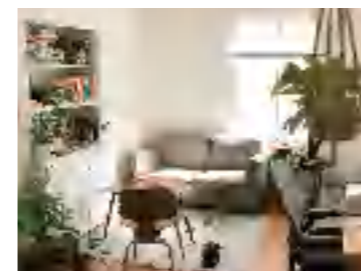

Electrical Products ----- P41-48

# LED

Indoor Fixtures



# LED Panel Light



# LED


Indoor Fixtures



# LED Panel Light




## SPECIFICATIONS





Model	Voltage	Power	Luminous efficiency	Color temperature	Dimension
ZL-PL6060-40	AC85-265V	40W	80-100lm/w	3000-6500K	600*600/605*605/595*595mm
ZL-PL6060-48	AC85-265V	48W	80-100lm/w	3000-6500K	600*600/605*605/595*595mm
ZL-PL30120-40	AC85-265V	40W	80-100lm/w	3000-6500K	300*1200/295*1195/305*1205mm
ZL-PL30120-48	AC85-265V	48W	80-100lm/w	3000-6500K	300*1200/295*1195/305*1205mm

## SPECIFICATIONS





Model	Voltage	Power	Luminous efficiency	Color temperature	Dimension
ZL-BPL6060-40	AC85-265V	40W	80-130lm/w	3000-6500K	600*600/605*605/595*595mm
ZL-BPL6060-48	AC85-265V	48W	80-130lm/w	3000-6500K	600*600/605*605/595*595mm
ZL-BPL30120-40	AC85-265V	40W	80-130lm/w	3000-6500K	300*1200/295*1195/305*1205mm
ZL-BPL30120-48	AC85-265V	48W	80-130lm/w	3000-6500K	300*1200/295*1195/305*1205mm

## FEATURES

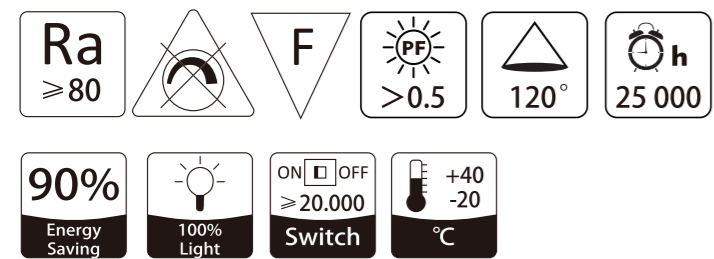

## FEATURES

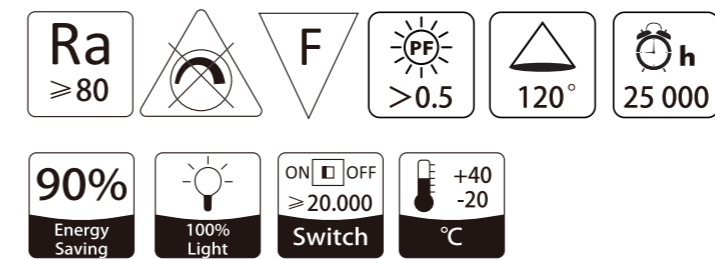

# LED

## Indoor Fixtures



# LED Slim Panel



# LED

## Indoor Fixtures



# LED Plastic Panel



### SPECIFICATIONS




Model	Voltage	Power	Luminous efficiency	Color temperature	Dimension
ZL-SDL12035-06	AC85-265V	6W	60-90lm/w	3000-6500K	120*35mm
ZL-SDL12035-12	AC85-265V	12W	60-90lm/w	3000-6500K	170*35mm
ZL-SDL12035-18	AC85-265V	18W	60-90lm/w	3000-6500K	225*35mm
ZL-SDL12035-24	AC85-265V	24W	60-90lm/w	3000-6500K	300*35mm

### SPECIFICATIONS



Model	Voltage	Power	Luminous efficiency	Color temperature	Dimension	Material
ZL-PPDL-6	AC85-265V	6W	≥70lm/w	3000-6500K	φ120*H28/32MM	plastic
ZL-PPDL-12	AC85-265V	12W	≥70lm/w	3000-6500K	φ170*H28/32MM	plastic
ZL-PPDL-18	AC85-265V	18W	≥70lm/w	3000-6500K	φ220*H28/32MM	plastic
ZL-PPDL-24	AC85-265V	24W	≥70lm/w	3000-6500K	φ240*H28/32MM	plastic
ZL-PPDL-32	AC85-265V	32W	≥70lm/w	3000-6500K	φ300*H28/32MM	plastic
ZL-PDOB-9	AC165-265V	6W	≥70lm/w	3000-6500K	φ145*H25/32MM	plastic
ZL-PDOB-12	AC165-265V	12W	≥70lm/w	3000-6500K	φ170*H25/32MM	plastic
ZL-PDOB-18	AC165-265V	18W	≥70lm/w	3000-6500K	φ225*H28/32MM	plastic
ZL-PDOB-24	AC165-265V	24W	≥70lm/w	3000-6500K	φ298*H30/32MM	plastic

### FEATURES



### FEATURES



# LED

Indoor Fixtures



## LED Adjustable Panel



# LED

Indoor Fixtures




## LED Downlight

### SPECIFICATIONS



Model	Voltage	Power	Luminous efficiency	Color temperature	Ceiling Hole	Dimension	Material
ZL-KTPL-12	AC85-265V	12W	90-100lm/w	3000-6500K	50-90mm	φ100*20mm/45mm	Alu/Iron+plastic
ZL--KTPL-18	AC85-265V	18W	90-100lm/w	3000-6500K	50-100mm	φ120*20mm/45mm	Alu/Iron+plastic
ZL--KTPL-24	AC85-265V	24W	90-100lm/w	3000-6500K	50-160mm	φ170*20mm/45mm	Alu/Iron+plastic
ZL--KTPL-36	AC85-265V	36W	90-100lm/w	3000-6500K	50-210mm	φ225*20mm/45mm	Alu/Iron+plastic
ZL--KTPL-48	AC85-265V	48W	90-100lm/w	3000-6500K	50-290mm	φ300*20mm/45mm	Alu/Iron+plastic

### FEATURES

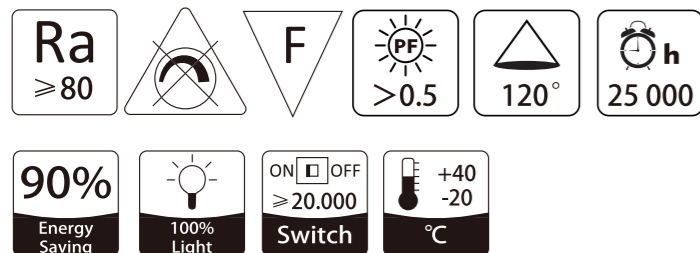


### SPECIFICATIONS



Model	Voltage	Power	Luminous efficiency	PF	Color temperature	CRI
SS-DL-36W	120/220V	36W	80-90lm/w	>0.5	2700/4000/6500K	>80
SS-DL-42W	120/220V	42W	80-90lm/w	>0.5	2700/4000/6500K	>80
SS-DL-45W	120/220V	45W	80-90lm/w	>0.5	2700/4000/6500K	>80

### FEATURES

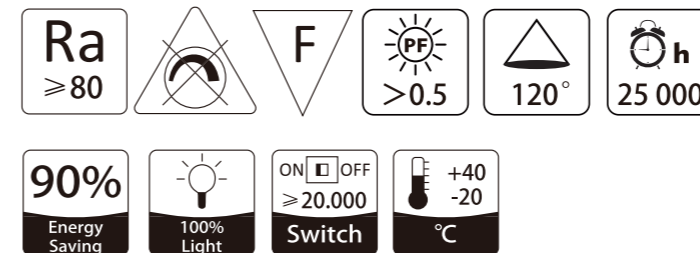

# LED

Indoor Fixtures



## LED Shoplight



# LED

Indoor Fixtures





## LED Ceiling Light

### SPECIFICATIONS




Model	Voltage	Watt	Luminous efficiency	Length
ZL-TF11-20BR2	AC120V	20W	70-110lm/w	2ft
ZL-TF11-40BR4	AC120V	40W	70-110lm/w	4ft
ZL-TF11-40404L	AC120V	40W	70-110lm/w	4ft
ZL-TF11-55404L	AC120V	55W	70-110lm/w	4ft
ZL-TF23-14FS2L	AC120V	14W	70-110lm/w	2ft
ZL-TF23-23FS2RL	AC120V	23W	70-110lm/w	2ft
ZL-TF23-28403	AC120V	28W	70-110lm/w	3ft
ZL-TF23-30FS4L	AC120V	30W	70-110lm/w	4ft
ZL-TF23-30404	AC120V	30W	70-110lm/w	4ft
ZL-TF23-36403	AC120V	36W	70-110lm/w	3ft
ZL-SL12	AC120V	50W	110LM/W	4ft
ZL-SL4M	AC120V	30W	110LM/W	4ft

### FEATURES

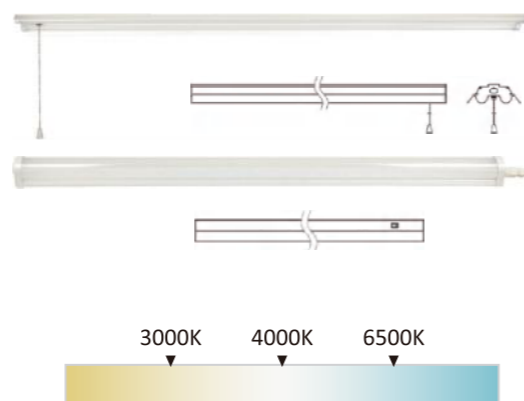
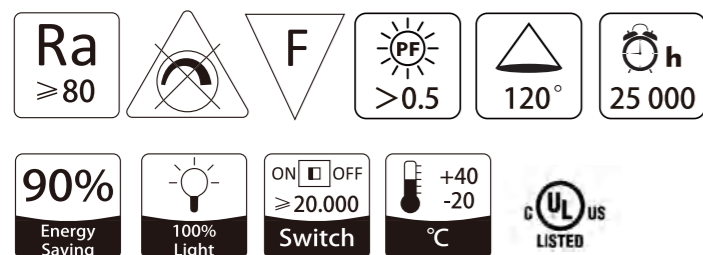


### SPECIFICATIONS



Model	Voltage	Power	CRI	PF	IP	Luminous efficiency
ZL-FSXDD-8C-12W-CCT	AC120-240V	12W	>80	>0.9	65	80lm/w±10%
ZL-FSXDD-12C-18W-CCT	AC120-240V	18W	>80	>0.9	65	80lm/w±10%
ZL-FSXDD-16C-24W-CCT	AC120-240V	24W	>80	>0.9	65	80lm/w±10%

### FEATURES

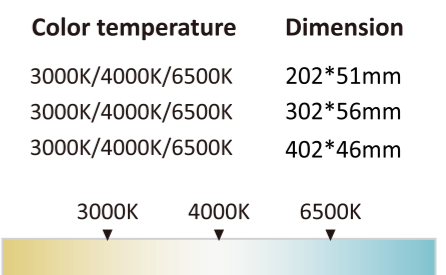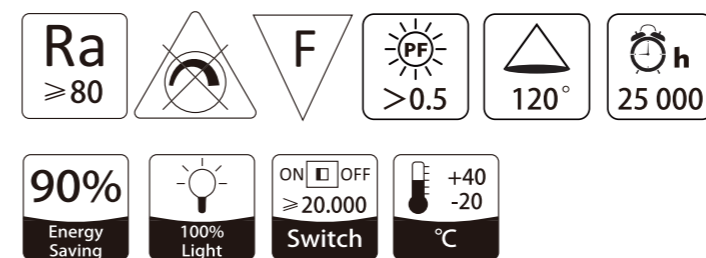

# LED

Indoor Fixtures



# LED Ceiling Light




# LED

Indoor Fixtures




# LED Ceiling Spot Light

## SPECIFICATIONS




Model	Voltage	Power	RA	PF	Luminous efficiency	Color temperature	Chasis Size	Lamp Size
GJY-CY250-12W	127/220/85-265V	12W	>80	0.5	80LM/W	2700/4000/6500K	230*15mm	250*60mm
GJY-CY330-18W	127/220/85-265V	18W	>80	0.5	80LM/W	2700/4000/6500K	300*15mm	330*15mm
GJY-CY380-24W	127/220/85-265V	24W	>80	0.5	80LM/W	2700/4000/6500K	350*15mm	380*15mm
GJY-CY500-48W	127/220/85-265V	48W	>80	0.5	80LM/W	2700/4000/6500K	450*15mm	500*15mm
GJY-YSY450-50W	127/220/85-265V	50W	>80	0.9	90LM/W	2700/4000/6500K	400*15mm	450*95mm
GJY-YSY550-60W	127/220/85-265V	60W	>80	0.9	90LM/W	2700/4000/6500K	500*15mm	550*95mm
GY-YSY800-100W	127/220/85-265V	100W	>80	0.9	90LM/W	2700/4000/6500K	650*15mm	785*105mm

## FEATURES


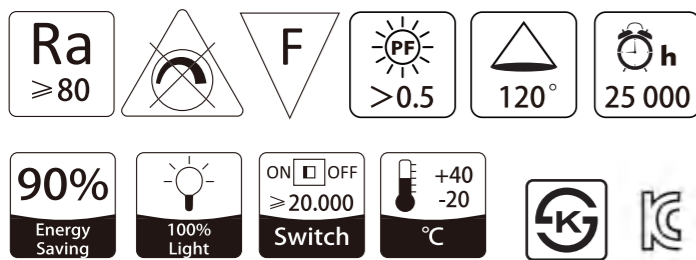


## SPECIFICATIONS



Model	Voltage	Power	Luminous flux	CRI	Dimension
ZL-SP-3	AC85-265V	3W	240lm	80	75*H20mm
ZL-SP-5	AC85-265V	5W	400lm	80	90*H20mm
ZL-SP-7	AC85-265V	7W	560lm	80	90*H20mm
ZL-SP-9	AC85-265V	9W	720lm	80	110*H20mm
ZL-SP-12	AC85-265V	12W	950lm	80	110*H20mm

## FEATURES

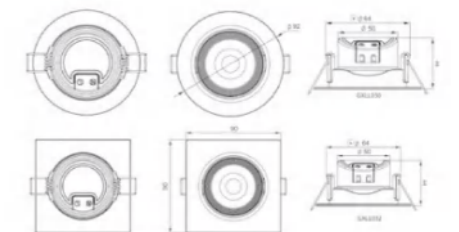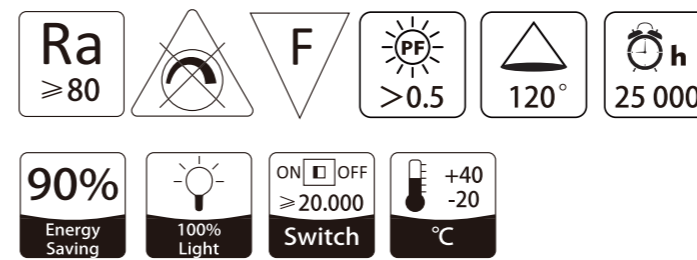


# LED

Indoor Fixtures

## LED Ceiling Spot Light




### SPECIFICATIONS



Model	Voltage	Power	Luminous flux	CRI	Housing Color
ZL-DL01	AC100-240V	1W	80lm	80	White/Black/Silver
ZL-DL03	AC100-240V	3W	240lm	80	White/Black/Silver/Golden/Wooden/Rose

### FEATURES

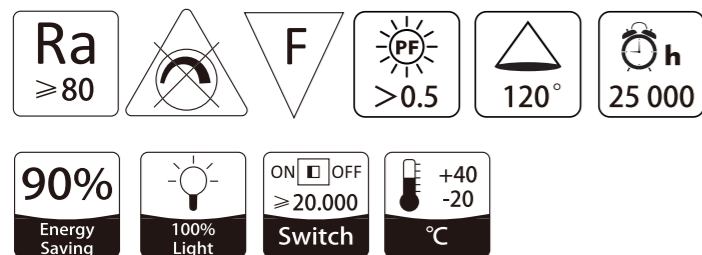

# LED

Indoor Fixtures

## LED PL Light




### SPECIFICATIONS



Model	Voltage	Power	CRI	PF	Luminous efficiency	Color temperature	Dimension
ZLBL-18	AC85-265V	18W	80	0.5	75lm/w	2700/4000/6500K	600*75*23mm
ZLBL-36	AC85-265V	36W	80	0.5	75lm/w	2700/4000/6500K	1200*75*23mm
ZLBL-45	AC85-265V	45W	80	0.5	75lm/w	2700/4000/6500K	1500*75*23mm

### FEATURES

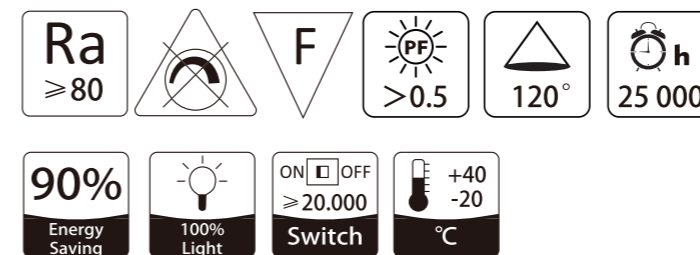




# LED

Indoor Fixtures



# T5 Light

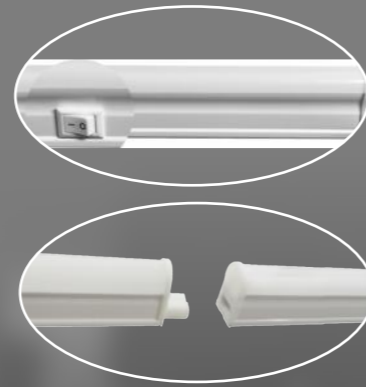


# LED

Indoor Fixtures





# LED Track Light

## SPECIFICATIONS



Model	Voltage	Power	CRI	PF	Luminous efficiency	Color temperature	Dimension
SS-T52P-6W	AC127/220v	6W	>80	>0.5	80lm/w	2700/4000/6500k	23.2*34.4*325mm
SS-T52P-10W	AC127/220v	10W	>80	>0.5	80lm/w	2700/4000/6500k	23.2*34.4*585mm
SS-T52P-15W	AC127/220v	15W	>80	>0.5	80lm/w	2700/4000/6500k	23.2*34.4*885mm
SS-T-20W	AC127/220v	20W	>80	>0.5	80lm/w	2700/4000/6500ka	23.2*34.4*1185mm

## FEATURES




### Features:

- High-quality acrylic lampshade.
- Highlight transmittance.
- Uniform refracted light.
- High safety, and long service life.
- Male and female tight connection.





## SPECIFICATIONS




Model	Voltage	Power	CRI	PF	Luminous flux	Color temperature	Beam angle	Dimension
ZL-XYA10	AC85-265V	10W	≥80	>0.5	800lm	3000K/4000K/6000K	24°	φ55*118mm
ZL-XYA20	AC85-265V	20W	≥80	>0.5	1600lm	3000K/4000K/6000K	24°	φ65*128mm
ZL-XYA30	AC85-265V	30W	≥80	>0.5	2400lm	3000K/4000K/6000K	24°	φ74*138mm
ZL-XYA40	AC85-265V	40W	≥80	>0.5	3200lm	3000K/4000K/6000K	24°	φ85*163mm
ZL-XJ10	AC85-265V	10W	≥80	>0.5	800lm	3000K/4000K/6000K	24°	φ55*118mm
ZL-XJ20	AC85-265V	20W	≥80	>0.5	1600lm	3000K/4000K/6000K	24°	φ65*148mm
ZL-XJ30	AC85-265V	30W	≥80	>0.5	2400lm	3000K/4000K/6000K	24°	φ75*168mm
ZL-XJ40	AC85-265V	40W	≥80	>0.5	3200lm	3000K/4000K/6000K	24°	φ85*185mm


## FEATURES



# LED Emergency Light

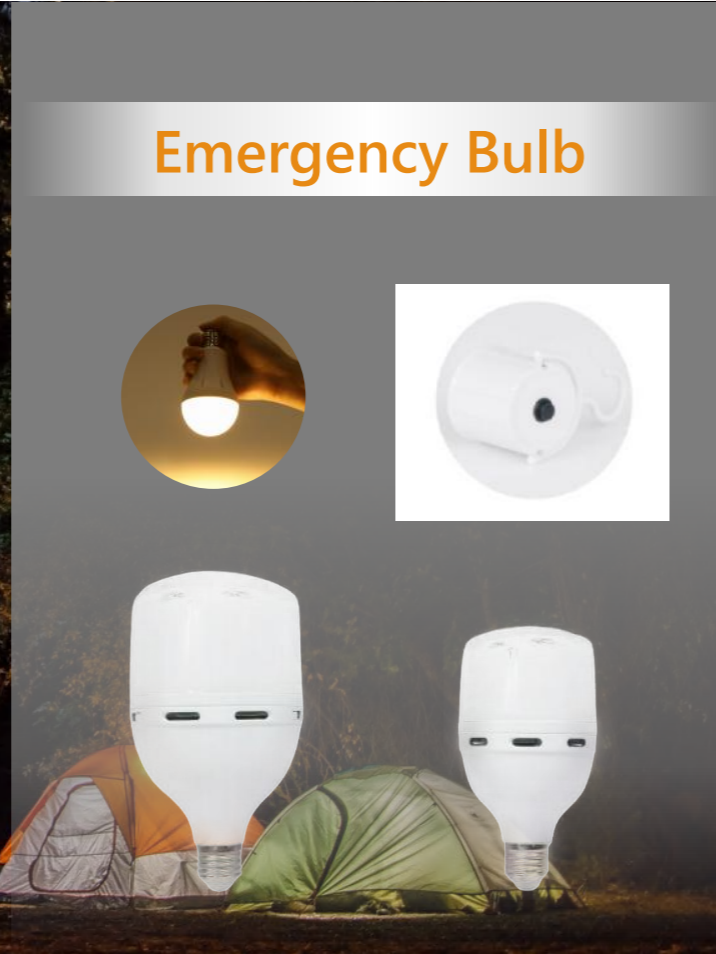


## SPECIFICATIONS





Model	Voltage	Power	Luminous flux	Color temperature	Dimension
ZL-EBA60-6W	AC85-265V	6W	AC650lm/DC200lm	2700K/4000/6500K	60*121mm
ZL-EBA70-8W	AC85-265V	8W	AC850lm/DC300lm	2700K/4000/6500K	70*140mm
ZL-EBT80-15W	AC185-265V	15W	AC1300lm/DC300lm	2700K/4000/6500K	80*155mm
ZL-EBT100-20W	AC185-265V	20W	AC1800lm/DC350lm	2700K/4000/6500K	100*185mm

## FEATURES

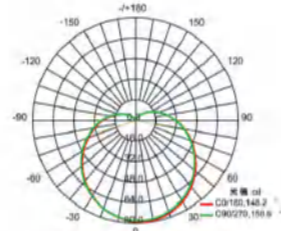

Beam Angle(50%) 149.4°

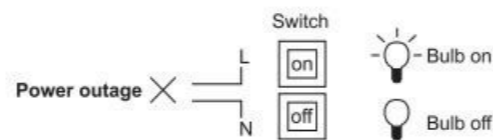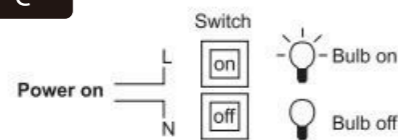

# LED Emergency Light




## SPECIFICATIONS



Model	Voltage	CRI	DC Lumen Output	Duration Emergency	Color temperature	Material	Dimension
SE-1901L30	AC85-265v	>80	High 150lm/Low 80lm	High 3hrs/Low 6hrs	6500K	Body: ABS V-0, Len:PS	220*58*28mm
SE-1902L60	AC85-265v	>80	High 240lm/Low 120lm	High 3hrs/Low 6hrs	6500K	Body: ABS V-0, Len:PS	330*70*30mm
SE-5216L30	AC85-265v	>80	High 120lm/Low 60lm	High 2hrs/Low 4hrs	6500K	Body: ABS, Len:PS	220*58*28mm
SE-5216L60	AC85-265v	>80	High 200lm/Low 100lm	High 3hrs/Low 6hrs	6500K	Body: ABS, Len:PS	220*58*28mm
SE-2310	AC85-265v	>80	High 100lm/Low 50lm	High 2hrs/Low 4hrs	6500K	Body:PP,Len:PS	150*50*23mm

## FEATURES



# LED

## Emergency Light

# LED Emergency Light



# LED

## Emergency Light




SE-1916L13

SE-EB2306

# LED Emergency Light



### SPECIFICATIONS




Model	Voltage	AC Lumen Output	DC Lumen Output	CRI	Duration Emergency	Color temperature	Material	Dimension
SE-EB102L	AC85-265V	120cd/m2	120cd/m2	80	2hrs	6500K	Body: ABS, Len:PS	240*185*20mm
SE-EB103L	AC85-265V	120cd/m2	120cd/m2	80	2hrs	6500K	Body: ABS V-0, Len:PS	356*200*26mm
SE-EB2408	AC85-265V	>50cd/m2	>50cd/m2	80	3hrs	6500K	Body: ABS, Len:PS	245*200*20mm

### SPECIFICATIONS



Model	Voltage	Battery	Installation	CRI	Duration Emergency	Color temperature	Material	Dimension
SE-1916L13	AC1000-240V	Lithium 3.7V 500mAh	Recess	80	2hrs	6500K	ABS+PC	121*80*36mm
SE-1917	AC220-240V	Ni-Cd 2.4V 800mAh	Surface/Recess	80	1hr	6500K	ABS+PC	245*100*45mm (mounting frame:282*137mm)
SE-EB2306	AC220-240V	Lithium 3.7V 2200mAh	Surface/Recess	80	2.5hrs	6500K	PC	D142*H48mm


### FEATURES

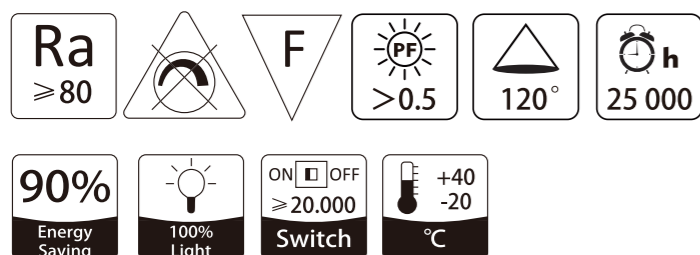

3000K 4000K 6500K



### FEATURES

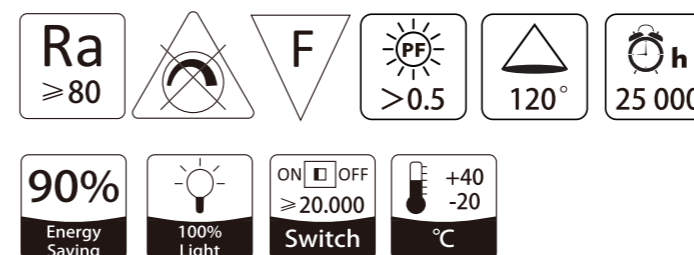

3000K 4000K 6500K



**LED**  
Outdoor Fixtures



**LED UFO**




**LED**  
Outdoor Fixtures





**LED Flood Light**

**SPECIFICATIONS**



Model	Voltage	Power	Luminous efficiency	Material	IP Rating	Dimension
ZL-GK32-100	AC85-265V	100W	80-110lm/w	Die-casting Alu+PC	IP65	242*58mm
ZL-GK32-150	AC85-265V	150W	80-110lm/w	Die-casting Alu+PC	IP65	275*58mm
ZL-GK32-200	AC85-265V	200W	80-110lm/w	Die-casting Alu+PC	IP65	317*58mm

**FEATURES**

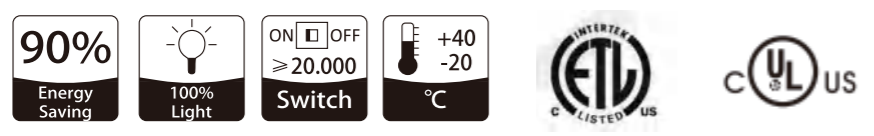



**SPECIFICATIONS**

**Retilap**

Model	Power	IP Grade	Specifications	Discharging Time
ZL-FL01	50W	IP65	Solar Panel: 20W/Battery Capacity: 15Ah	12-16 hours
ZL-FL01	120W	IP65	Solar Panel: 25W/Battery Capacity: 25Ah	14-16 hours
ZL-FL01	150W	IP65	Solar Panel: 30W/Battery Capacity: 25Ah	14-16 hours
ZL-FL01	200W	IP65	Solar Panel: 35W/Battery Capacity: 30Ah	14-16 hours

Model	Voltage	Power	Luminous efficiency	CCT
ZL-FL01-10	AC85-265V	10W	80lm/w	2700-6500K
ZL-FL01-20	AC85-265V	20W	80lm/w	2700-6500K
ZL-FL01-30	AC85-265V	30W	80lm/w	2700-6500K
ZL-FL01-40	AC85-265V	40W	80lm/w	2700-6500K
ZL-FL01-50	AC85-265V	50W	80lm/w	2700-6500K
ZL-FL01-100	AC85-265V	100W	80lm/w	2700-6500K
ZL-FL01-150	AC85-265V	150W	80lm/w	2700-6500K
ZL-FL01-200	AC85-265V	200W	80lm/w	2700-6500K

**FEATURES**



## LED Street Light



## LED

### Outdoor Fixtures



## LED Bulkhead



## LED

### Outdoor Fixtures



### SPECIFICATIONS



### SPECIFICATIONS

Model	Voltage	Power	Luminous efficiency	CCT
ZL-FL01-10	AC85-265V	10W	80lm/w	2700-6500K
ZL-FL01-20	AC85-265V	20W	80lm/w	2700-6500K
ZL-FL01-30	AC85-265V	30W	80lm/w	2700-6500K
ZL-FL01-40	AC85-265V	40W	80lm/w	2700-6500K
ZL-FL01-50	AC85-265V	50W	80lm/w	2700-6500K
ZL-FL01-100	AC85-265V	100W	80lm/w	2700-6500K
ZL-FL01-150	AC85-265V	150W	80lm/w	2700-6500K
ZL-FL01-200	AC85-265V	200W	80lm/w	2700-6500K

Model	Voltage	Power	Luminous efficiency	CCT	IP	Dimension
ZL-BHFR-08	AC85-265V	8W	80lm/w	2700-6500K	54	170*88*69mm
ZL-BHFR-12	AC85-265V	12W	80lm/w	2700-6500K	54	270*145*81mm
ZL-BHFR-15	AC85-265V	15W	80lm/w	2700-6500K	54	160*160*72mm
ZL-BHFR-18	AC85-265V	18W	80lm/w	2700-6500K	54	220*220*78mm
ZL-BHFT-08	AC85-265V	8W	80lm/w	2700-6500K	54	280*280*80mm
ZL-BHFT-12	AC85-265V	12W	80lm/w	2700-6500K	54	160*160*72mm
ZL-BHFT-15	AC85-265V	15W	80lm/w	2700-6500K	54	220*220*78mm
ZL-BHFT-18	AC85-265V	18W	80lm/w	2700-6500K	54	280*280*80mm

### FEATURES

### FEATURES

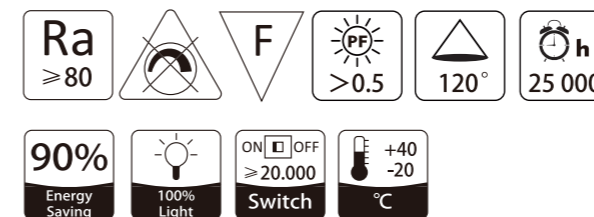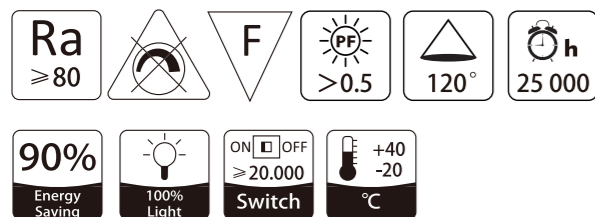

# LED

## Outdoor Fixtures



# LED WALL LIGHT



# LED

## Outdoor Fixtures




# Ground Solar Light

### SPECIFICATIONS



Model	Dimension	Power	Material	Voltage
ZL-AWL217-1	150*70	12W	ALU	100-240V
ZL-AWL217-2	185*105*70	12W	ALU	100-240V
ZL-AWL217-3	145*145*70	12W	ALU	100-240V

### FEATURES

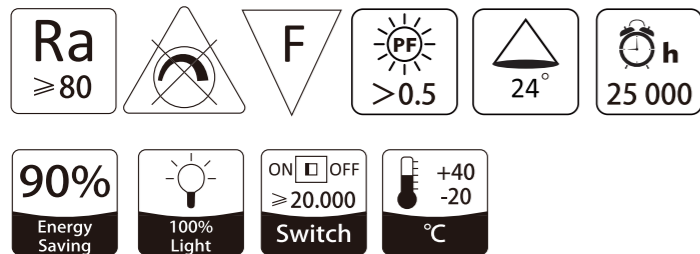


### FEATURES:

USB + Type-C mould for above read light  
5V/2.4A out put.




### SPECIFICATIONS



Model	Battery	Solar Panel	Luminous efficiency	Material	Color temperature	Dimension	Waterproof
ZL-SP-01	Li-ion	Polysilicon	50 / 35 / 25lm/w	ABS+PC	3000-6500K	112 * 103 * 290mm	IP67
ZL-SP-02	Li-ion	Polysilicon	50 / 35 / 25lm/w	ABS+PC	3000-6500K	112 * 103 * 290mm	IP67
ZL-SP-03	Li-ion	Polysilicon	50 / 35 / 25lm/w	ABS+PC	3000-6500K	112 * 103 * 290mm	IP67
ZL-SP-04	Li-ion	Polysilicon	50 / 35 / 25lm/w	ABS+PC	3000-6500K	112 * 103 * 290mm	IP67
ZL-SP-05	Ni-MH	Polysilicon	/	ABS+PC	3000-6500K	112 * 112 * 121mm	IP68

### FEATURES

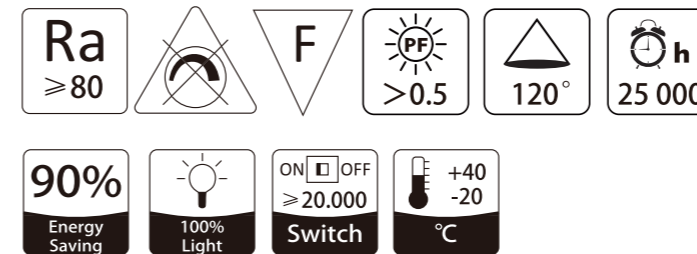

# LED

## Outdoor Fixtures



### LED Wall Lamp



4W



6W



8W



4W



6W



8W




6W



6W



1\*GU10



1\*GU10



5W



5W



2\*GU10



2\*GU10



2\*5W



2\*5W

# LED

Bulbs Portfolio



## LED Spot Light



### SPECIFICATIONS

Model	Voltage	Power	Luminous efficiency	Color temperature	Dimension
ZL-PAR20/30/38-7	AC85-265V	7W	70-80lm/w	3000-6500K	64*88mm
ZL-PAR20/30/38-12	AC85-265V	12W	70-80lm/w	3000-6500K	94*118mm
ZL-PAR20/30/38-15	AC85-265V	15W	70-80lm/w	3000-6500K	120*135mm
ZL-PAR30 COB	AC85-265V	30W	70-80lm/w	3000-6500K	95*132mm


### FEATURES



# LED

Bulbs Portfolio


## LED T Bulb

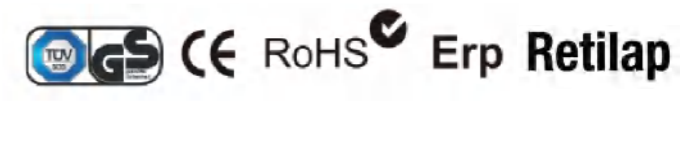

### SPECIFICATIONS

Model	Voltage	Power	Luminous efficiency	Color temperature	Dimension
ZL-T80-20	AC85-265V	20W	90-100lm/w	3000-6500K	80*143mm
ZL-T100-30	AC85-265V	30W	90-100lm/w	3000-6500K	100*178mm
ZL-T120-40	AC85-265V	40W	90-100lm/w	3000-6500K	120*198mm
ZL-T140-50	AC85-265V	50W	90-100lm/w	3000-6500K	140*226mm
ZL-T160-70	AC85-265V	70W	90-100lm/w	3000-6500K	160*270mm
ZL-T180-100	AC85-265V	100W	90-100lm/w	3000-6500K	180*296mm

### FEATURES



# LED

## Bulbs Portfolio



# LED Alu Bulb

### SPECIFICATIONS



Model	Voltage	Power	Luminous efficiency	Color Temperature	Base	Material
ZL-Magnolia	AC85-265V	20-80W	70-100LM/W	3000-6500K	E27/E40	Alu+PC
ZL-UFO	AC85-265V	20-70W	70-100LM/W	3000-6500K	E27/E40	Alu+PC
ZL-ALU-T BULB	AC85-265V	20-150W	70-130LM/W	3000-6500K	E27/E40	Alu+PC

### FEATURES




# LED

## Bulbs Portfolio

# LED Strip




### SPECIFICATIONS



Model	Voltage	Power	IP Grade	Color	PCB width	Length	Material
ZL-NEON-120P	AC110V/220V	8W	IP20/IP65	3000-6500K/RED/GREEN/BLUE/PINK	6mm/8mm	50m/100m	PVC
ZL-NEON-120P	12V/24V	8W	IP20/IP65	/GOLDEN/PURPLE/YELLOW/RGB	6mm/8mm	50m/5m	PVC

### FEATURES



# LED

## Bulbs Portfolio

# LED String Bulb




12V



linkable



solar panel




### SPECIFICATIONS

Model	Voltage	Base	Length	Material	Color Temperature
LED STRING LIGHT-12	AC120/220V	12	25ft/48ft	PVC+Glass	2700K
LED STRING LIGHT-15	AC120/220V	15	25ft/48ft	PVC+Glass	2700K

### FEATURES

- Ra** ≥ 80
- F** (Flicker-free)
- PF** > 0.5
- 120°** beam angle
- 25 000** hours lifespan
- 90%** Energy Saving
- 100%** Light
- Switch** (ON/OFF ≥ 20,000)
- Temperature** range: +40 to -20 °C



# LED

## Bulbs Portfolio

# LED Filament Bulb



### SPECIFICATIONS

Model	Voltage	Power	Luminous flux	Dimension
ZL-FA60	AC110/220V	4/6/8/9W	400/600/850/1050lm	Φ60*105mm
ZL-FC35	AC110/220V	2/4/5/6W	200/400/550/700lm	Φ35*98mm
ZL-FST64	AC110/220V	6/8/9/10/12W	400/600/850/1050/1200/1500lm	Φ64*142mm
ZL-FG95	AC110/220V	6/8/9/10/12W	400/600/850/1050/1200/1500lm	Φ95*142mm


### FEATURES

- Ra** ≥ 80
- F** (Flicker-free)
- PF** > 0.5
- 120°** beam angle
- 25 000** hours lifespan
- 90%** Energy Saving
- 100%** Light
- Switch** (ON/OFF ≥ 20,000)
- Temperature** range: +40 to -20 °C

- Wi-fi Control**
- Mobile Control**

**Glass Color**

- Clear/Amber/Smoke grey
- RGBW Bulb**



# LED

## Bulbs Portfolio

### T8 Tube



EMERGENCY T8



### SPECIFICATIONS

Model	Voltage	Power	Luminous efficiency	Circuit conduction	Material
ZL-PGT-T5	AC85-265V	10/20/30W	80-140lm/w	Single end/double end	Glass/PC
ZL-PGT-T8	AC85-265V	10/20/30W	80-140lm/w	Single end/double end	Glass/PC/PC+Alu
ZL-T8-EMERGENCY	AC85-265V	18W	AC:90-110LM/W DC600LM	Single end/double end	Alu+PC


### FEATURES



# LED

## Bulbs Portfolio


### LED A Bulb



### SPECIFICATIONS

Model	Voltage	Power	Luminous efficiency	Color temperature	Dimension
ZL-A50-05	AC85-265V	5W	90lm/w	3000-6500K	50*85mm
ZL-A55-07	AC85-265V	7W	90lm/w	3000-6500K	55*98mm
ZL-A60-09	AC85-265V	9W	90lm/w	3000-6500K	60*108mm
ZL-A60-12	AC85-265V	12W	90lm/w	3000-6500K	60*118mm
ZL-A70-15	AC85-265V	15W	90lm/w	3000-6500K	70*130mm
ZL-A80-18	AC85-265V	18W	90lm/w	3000-6500K	80*152mm

### FEATURES



#### AUTOMATIC



# LED

## Bulbs Portfolio



# LED Stick Bulb

# LED

## Bulbs Portfolio




# LED Spot Light

### SPECIFICATIONS





Model	Voltage	Power	Luminous efficiency	Color temperature	Dimension
ZL-T35	AC85-265V	5W	80-90lm/w	3000-6500K	35*84mm
ZL-T37	AC85-265V	7W	80-90lm/w	3000-6500K	37*98mm
ZL-T39	AC85-265V	9W	80-90lm/w	3000-6500K	39*114mm
ZL-T45	AC85-265V	12W	80-90lm/w	3000-6500K	45*130mm
ZL-T50	AC85-265V	15W	80-90lm/w	3000-6500K	50*140mm

### SPECIFICATIONS





Model	Voltage	Power	Luminous efficiency	Color temperature	Dimension
ZL-SPGU10-03	AC85-265V	3W	70-80lm/w	3000-6500K	50*53mm
ZL-SPGU10-05	AC85-265V	5W	70-80lm/w	3000-6500K	50*53mm
ZL-SPGU10-07	AC85-265V	7W	70-80lm/w	3000-6500K	50*53mm
ZL-SPGU10-09	AC85-265V	9W	70-80lm/w	3000-6500K	50*53mm

### FEATURES



### FEATURES

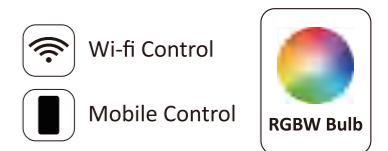

# LED

## Bulbs Portfolio



### LED Color Bulb



#### SPECIFICATIONS

Model	Voltage	Power	Color
ZL-CBGU1001	AC85-265V	1-3W	RED/YELLOW/GREEN/BLACK
ZL-CBG45001	AC85-265V	1-3W	RED/YELLOW/GREEN/BLACK
ZL-CBA60001	AC85-265V	1-3W	RED/YELLOW/GREEN/BLACK

#### FEATURES




3000K 4000K 6500K



# LED

## Function Lamp




### Mosquito Bulb



#### SPECIFICATIONS


Model	Voltage	Power	Luminous efficiency	Wavelength	Dimension
ZL-SQ001	AC85-265V	7W	70-80lm/w	520-590nm	64*88mm
ZL-SQ002	AC85-265V	12W	70-80lm/w	520-590nm	94*118mm

#### FEATURES



3000K 4000K 6500K



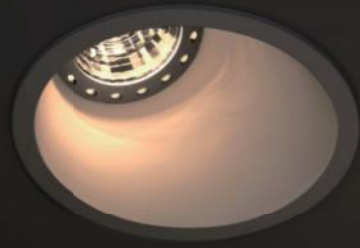

GU10 lamp fixture



N0375-C



N01255



N04100



N048080



N01370A



N0375



N010100A



N09100A

## E27 Desk Lamp



## Retilap

## Sensor



BL07



BL303



BL305-3



BL24

## Retilap



BL10F



BL451



BL301



BL41H

Socket



T9601-1



T9602-1



T9602-1

Retie




TM-1



TM-1



OMIGP-15A

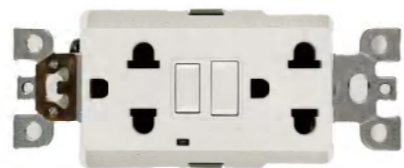

TGS16

Socket



OM-USB47RS



OM-USB47RS




TGM15


Retie



TM-5

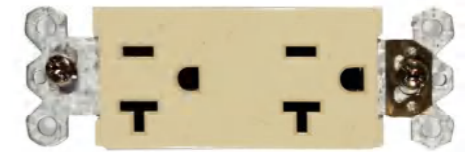

TMDR15/1J

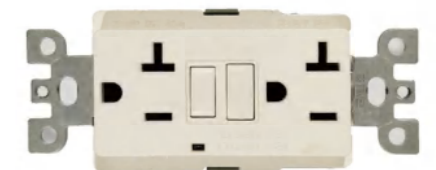

TGM20

Retie



Retie

